

DECNO

floor of innovation



LAMINATE FLOORING

-8.0 Premium Plank

- Crystal Surface
- Bevelled painted V-groove

LAMINATE FLOORING

Decor Colors

Size: 1215x143mm | Thickness: 8.0mm Wear Layer: AC3,Class 31




DEMB-004



DEMB-005



DEMB-006

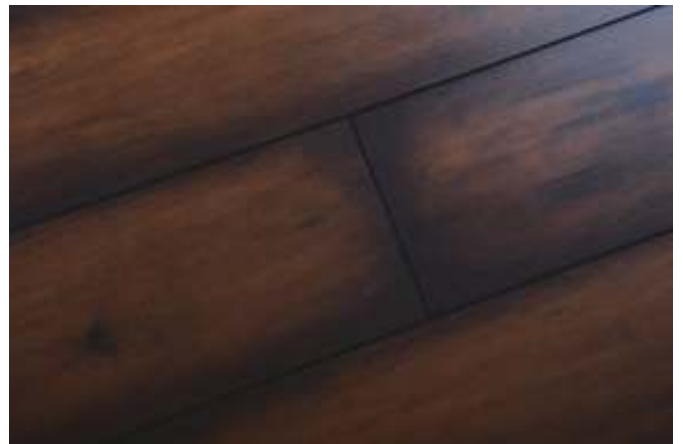

DEMB-007



DEMB-008



DEMB-009

LAMINATE FLOORING

Photo Gallery



DEMB 004



DEMB 005

LAMINATE FLOORING

Photo Gallery



DEMB 006



DEMB 007

LAMINATE FLOORING

Photo Gallery



DEMB 008



DEMB 009

LAMINATE FLOORING

Surface type



Crystal



Classification · 8.0 Premium Plank

DECNO meets the requirements of EN-ISO 10582



Level of use 22
Heavy residential use

EN 13329

Bed room, living rooms,
home offices, etc.



Level of use 32
Light commercial use

EN 13329

Offices, kids play room, changing room,
low traffic areas, etc.



Abrasion resistance

EN 13329

AC3 Calss31



Impact resistance

EN 13329

IC2



Reaction to fire

DIN 4102 T 1
EN 13501-1

B1
Cт s1



Dynamic coefficient of friction

EN 13893
EN 14041

m³ 0.3
DS



Anti Static characteristics

EN 13893
EN 14041

Laboratory test is fulfilled



Resistance to staining

EN438-2

Materials of group1+2: ³grade5
Materials of group3: ³grade4



Resistance to cigarette burns

EN438-2

Slight change of the surface's grande 4



Light fastness

EN ISO 105-B02
EN 20105-A02

Blue wool scale : ³6
Grey scale : ³4



Static indentation

EN 433

No visible change, i.e. f 0,01mm indentation
using a straightsteel cylinder, $\Delta E = 11,30\text{mm}$



Effect of a furniture leg

EN 424

No change in appearance or damage,
as defined in EN425.
Single-wheel castors, as defined in
EN12529:1998, 5.4.4.2 (Type W) shall be used.



Effect of a castor chair

EN 425

No change in appearance or damage,
as defined in EN425.
Single-wheel castors, as defined in
EN12529:1998, 5.4.4.2 (Type W) shall be used.



Formaldehyde emission

DIN EN 14041

E1